


Surface Equipment Shooting Panel

PN: 101705

Shooting Panel Operation

Caution: Before arming, assure Shooting Panel mode Select Switch is in "Safe" Position, key is removed, SI On/Off Switch is off, and voltage adjust knob fully CCW.

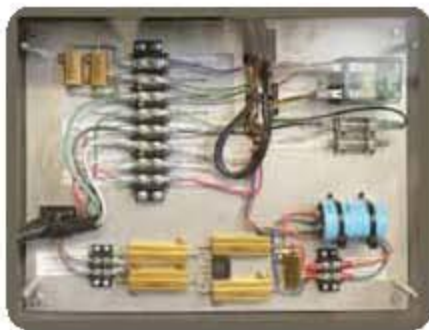

1. Set CCL/Interface switch to "interface"
2. Neg/Pos switch to "Pos."
3. To operate install key, rotate Mode Select Switch to "Shoot"
4. Rotate Voltage Knob fully CCW to reset.
5. Lift left switch cover, set switch to "On."
6. Lift Right switch cover, push and hold switch to "On."
7. Armed light will now be On, if not assure Voltage Knob is fully CCW.
8. Rotate Voltage Knob CW while monitoring DC Voltage and Amps.
9. After firing, release switch, rotate Voltage Knob fully CCW, switch ON/OFF to "Off", place Mode Select to "Safe."

These instructions are for Operation of the Shooting Panel ONLY! You MUST refer to API RP-67 for safe shooting practices.