


CUSTOM CABINETS AND JUNCTION BOXES





We put things

Pepperl+Fuchs products are used throughout the world in applications involving industrial, hazardous and corrosive environments. By engineering a complete solution at our own facility, Pepperl+Fuchs is able to offer its world-class products in a variety of panels and enclosures designed and built according to your specifications.

We are capable of developing and manufacturing a wide range of solutions including:

- Field Junction Box
- Remote I/O Enclosures
- Purge & Pressurization Systems
- Cabinets

From the initial concept to start-up and commissioning, Pepperl+Fuchs will provide you with professional service and unmatched performance.


FIELD JUNCTION BOX

Customer- and industry-specific solutions for FieldConnex®




REMOTE I/O ENCLOSURES

Customer- and industry-specific solutions for Remote I/O

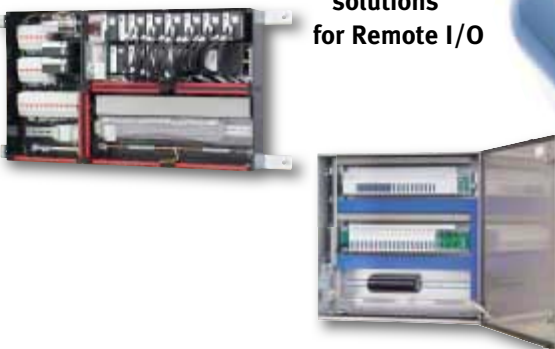

together



PURGED CABINET SOLUTIONS

Customer- and industry-specific solutions for applications ranging from Type X, Y and Z, to Ex [nP] and Ex [p].

PURGED CABINET SOLUTIONS

... and deliver solutions.


CABINETS

CABINETS
Customer- and industry-specific solutions including interface, marshalling, control room and fieldbus power types.





FIELD JUNCTION BOX STAINLESS STEEL HOUSING

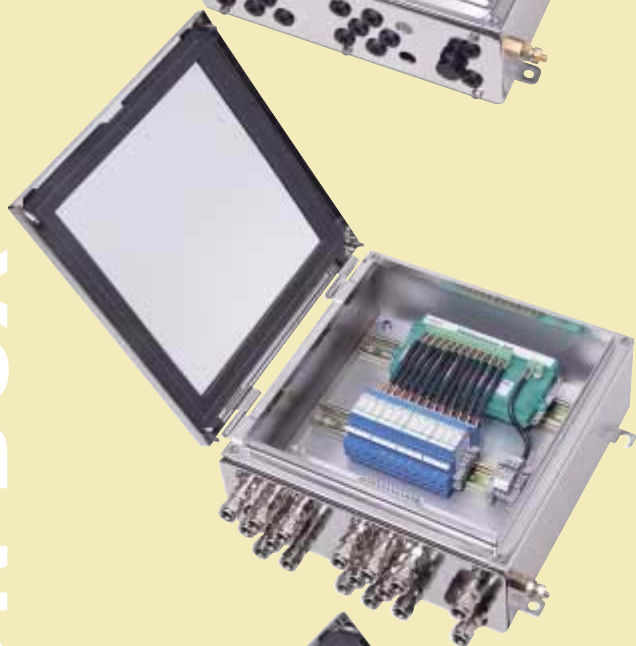

RECOMMENDATIONS FOR STAINLESS STEEL ENCLOSURES

Our stainless steel enclosures are ideal for use in washdown applications where a complete watertight seal is required, or for highly corrosive areas where standard enclosures would not hold up, with IP68 and Type 6 ingress protection ratings.

CUSTOMER- AND INDUSTRY-SPECIFIC SOLUTIONS FOR FIELDCONNEX®

No application is quite the same as another; every application always places demands on the design and features of a fieldbus junction box. To meet the unique needs of the customer, we introduce our new modular Field Junction Box System for our familiar FieldConnex® products. In addition to the housing size, you can customize your Field Junction Box to your own personal needs, from the cable glands to the electronics to overvoltage protection.

Besides a custom-fit solution for your application, the Field Junction Box reduces engineering costs and allows the fastest possible installation on location.

GENERAL SYSTEM FEATURES

- Ex-approved installation solutions for fieldbus in zones 1 / 2 / 21 / 22 and Div. 1 / Div. 2 (PTB 07 ATEX 1061, IEC Ex PTB 07.0036)
- Customer-oriented availability
- Customer- and industry-specific solutions for fieldbus distribution (non-Ex solutions also available)

TECHNICAL INFORMATION

Standardized housing dimensions	(280 x 170 x 100) mm / (11.02 x 6.69 x 5.35) " (300 x 200 x 120) mm / (11.81 x 7.87 x 4.72) " (380 x 380 x 160) mm / (14.96 x 14.96 x 6.30) " others available on request (480 x 400 x 160) mm / (18.90 x 15.75 x 6.30) "	
General housing features	SS316l, high-gloss polish Mounting brackets Door hinges M10 grounding screws DIN-rail mounted Mounting plate Gland plate II2GD EEx e II available	380 x 380 x 160 mm and larger 380 x 380 x 160 mm and larger
Cable glands M20	Plastic Nickel-plated brass Stainless steel Nickel-plated brass for armored cable Stainless steel for armored cable	
Condensate drain / ventilation M20	Plastic Nickel-plated brass Stainless steel	
Terminals for EEx e	Screw terminals Spring terminals	Grey Grey
Terminals for EEx ia	Screw terminal with disconnect Spring terminal with disconnect	Blue Blue
Internal wiring	Fieldbus cable type A, orange Fieldbus cable type A, blue	EEx e EEx ia
Grounding bar	Isolated Non isolated	
Tag label	Traffolyte Stainless steel (SS304)	(120 x 30) mm / (4.72 x 1.22) " (120 x 30) mm / (4.72 x 1.22) "
Environmental	Operating temperature Storage temperature Relative Humidity % RH (non condensing) IP rating (Metallic cable glands) IP rating (Plastic cable glands) Impact resistance	-40 °C to +60 °C -40 °C to +80 °C 5 to 95 % IP68 to EN 60529 Type 6 IP66 to EN 60529 Type 4X 7 Nm to EN 50014
Approvals	PTB 07 ATEX 1061 IEC Ex PTB 07.0036	

Customer components are also available



FIELD JUNCTION BOX POLYESTER (GRP) HOUSING



RECOMMENDATIONS FOR POLYESTER (GRP) ENCLOSURES

For a lightweight solution, the economical choice is our GRP field junction box. This is an ideal solution for most installations, with IP66 and Type 4X ingress protection ratings.

CUSTOMER- AND INDUSTRY-SPECIFIC SOLUTIONS FOR FIELDCONNEX®

No application is quite the same as another; every application always places demands on the design and features of a fieldbus junction box. To meet the unique needs of the customer, we introduce our new modular Field Junction Box System for our familiar FieldConnex® products. In addition to the housing size, you can customize your Field Junction Box to your own personal needs, from the cable glands to the electronics to overvoltage protection.

Besides a custom-fit solution for your application, the Field Junction Box reduces engineering costs and allows the fastest possible installation on location.

GENERAL SYSTEM FEATURES

- Ex-approved installation solutions for fieldbus in zones 1 / 2 / 21 / 22 and Div. 1 / Div. 2 (oEC Ex PTB 07.0036)
- Customer-oriented availability
- Customer- and industry-specific solutions for fieldbus distribution (non-Ex solutions also available)

TECHNICAL INFORMATION

Standardized housing dimensions	(271 x 271 x 136) mm / (10.67 x 10.67 x 5.35) " (544 x 271 x 136) mm / (21.42 x 10.67 x 5.35) " others available on request (544 x 544 x 136) mm / (21.42 x 21.42 x 5.35) "	
General housing features	Polyester (GRP) Mounting brackets M10 grounding screws DIN-rail mounted Earth conduit plate Gland plate II 2GD EEx e II available	Optional (544 x 271 x 136) mm and larger
Cable glands M20	Plastic Nickel-plated brass Stainless steel Nickel-plated brass for armored cable Stainless steel for armored cable	
Condensate drain / ventilation M20	Plastic Nickel-plated brass Stainless steel	
Terminals for EEx e	Screw terminals Spring terminals	Grey Grey
Terminals for EEx ia	Screw terminal with disconnect Spring terminal with disconnect	Blue Blue
Internal wiring	Fieldbus cable type A, orange Fieldbus cable type A, blue	EEx e EEx ia
Grounding bar	Isolated Non isolated	
Tag label	Traffolyte Stainless steel (SS304)	(120 x 30) mm / (4.72 x 1.22) " (120 x 30) mm / (4.72 x 1.22) "
Environmental	Operating temperature Storage temperature Relative Humidity % RH (non condensing) IP rating Impact resistance	-40 °C to +60 °C -40 °C to +80 °C 5 to 95 % IP66 to EN 60529 Type 4X 7 Nm to EN 50014
Approvals	PTB 07 ATEX 1061 IEC Ex PTB 07.0036	

Customer components are also available



FIELD JUNCTION BOX ALUMINUM HOUSING



RECOMMENDATIONS FOR ALUMINUM ENCLOSURES

For non-corrosive environments the economical choice is our aluminum field junction box. This is an ideal solution for most installations, with ingress protection ratings of IP67 and Type 4X.

CUSTOMER- AND INDUSTRY-SPECIFIC SOLUTIONS FOR FIELDCONNEX®

Our well-proven cast aluminum enclosure is the ideal solution for quick and easy site installation. It can be installed close to the field instruments, even in Zone 1, and keeps the wiring and engineering costs to a minimum. FieldConnex® electronics are fitted in the enclosure. There is a choice of cable glands and connectors to suit the demands of the process industries.

GENERAL SYSTEM FEATURES

- Ex-approved installation solutions for fieldbus in zones 1 / 2 / 21 / 22 and Div. 1 / Div. 2
- Customer-oriented availability
- Customer- and industry-specific solutions for fieldbus distribution (non-Ex solutions also available)



TECHNICAL INFORMATION

Standardized housing dimensions	(217 x 114 x 84) mm / (8.54 x 4.48 x 11.81) "		
General housing features	Aluminum Mounting brackets Earthing point	ALSI12 (CU) DIN 1725 (Si 1,2%), anodised	
Cable glands M16 / M20	Plastic Nickel-plated brass Stainless steel Nickel-plated brass for armored cable		
Plug connection	Plug connection M12 x 1; stainless steel Plug connection M12 x 1; nickel-plated brass Plug connection 7/8", stainless steel		
Environmental	Operating temperature	-30 °C to +70 °C	Plastic cable glands
	operating temperature	-40 °C to +70 °C	Metallic cable glands
	Operating temperature	-25 °C to +70 °C	M12 x 1 plug connection
	Operating temperature	-40 °C to +70 °C	7/8" plug connection
	Storage temperature	-40 °C to +85 °C	
	IP rating	IP66 to EN 60529	Type 4X
Approvals	Canada CSA USA FM China Nepsi Europe PTB ATEX PTB IECEx	CoC 1592754 CoC 3015728 GYJ 04270 PTB 02 ATEX 2086 IECEx PTB 03.0003	





FIELD JUNCTION BOX CUSTOMIZED APPLICATIONS



MARINE APPLICATION

- Standardized Walsall enclosure (380 x 380 x 160 mm)
- Type 316L stainless steel, high-gloss polish
- Gland plate
- Marine approved cable glands for armored cables
- Prewired with single wire in cable duct
- Fieldbarrier



APPLICATION WITH R2-SEGMENT PROTECTOR

- CCH enclosure (Excell 508 x 508 x 200 mm)
- Type 316L stainless steel, high-gloss polish
- Gland plate
- Segment protector R2-SP-N12



APPLICATION FOR ZONE 1

- CCH enclosure (ExCell)
- Type 316L stainless steel, high-gloss polish
- Gland plate
- Prewired with single wire in cable duct
- Fieldbarrier
- Valve box with 2:1 terminals
- Surge trunk
- Terminator


APPLICATION WITH FIELDBARRIER

- CCH enclosure (ExCell 508 x 508 x 200 mm)
- Type 316L stainless steel, high-gloss polish
- Gland plate
- Prewired with Fieldbus cable Typ A
- Terminals for trunk and spurs
- Fieldbarrier



APPLICATION WITH FIELDBARRIER

- Polyester (GRP) enclosure
- Prewired with single wire and Fieldbus cable Typ A in cable duct
- Trunk life disconnect terminals
- Terminator with surge arrestor
- Fieldbarrier



REMOTE I/O ENCLOSURES STAINLESS STEEL HOUSING



RECOMMENDATIONS FOR STAINLESS STEEL ENCLOSURES

Our stainless steel enclosures are ideal for use in washdown applications where a complete watertight seal is required, or for highly corrosive areas where standard enclosures would not hold up, with IP68 and Type 6 ingress protection ratings.

CUSTOMER- AND INDUSTRY-SPECIFIC SOLUTIONS FOR REMOTE I/O

No application is not quite the same as another; every application always places new demands on the design and features of a Remote I/O-box. That's why Pepperl+Fuchs delivers custom enclosure solutions for our familiar Remote I/O-products.

In addition to a custom-fit solution for your application, the Remote I/O enclosures reduce engineering costs and allow the fastest possible installation on location.

GENERAL SYSTEM FEATURES

- Ex-approved installation solutions for fieldbus in zones 1 / 2 / 21 / 22 and Div. 1 / Div. 2
- Customer-oriented availability
- Customer- and industry-specific solutions for fieldbus distribution (non-Ex solutions also available)


TECHNICAL INFORMATION

Standardized housing dimensions others available on request	(1000 x 800 x 300) mm / (39.37 x 34.49 x 11.81) " (800 x 800 x 300) mm / (34.49 x 34.49 x 11.81) " (600 x 600 x 210) mm / (23.62 x 23.62 x 8.27) "		
General housing features	SS316I, High-gloss polish Mounting brackets Door hinges M10 grounding screws	DIN-rail mounted Mounting plate Gland plate II 2GD EEx e II available	
Cable glands M16, M20, M25	Plastic Nickel-plated brass Stainless steel Nickel-plated brass for armored cable Stainless steel for armored cable		
Condensate drain / ventilation M20	Plastic Nickel-plated brass Stainless steel		
Terminals for EEx e	Screw terminals Spring terminals	Grey Grey	
Terminals for EEx ia	Screw terminal with disconnect Spring terminal with disconnect Terminals with disconnect	Blue Blue Blue	
Internal wiring in cable duct	Black Blue	EEx e EEx ia	
Grounding bar	Isolated Non isolated		
Environmental	Operating temperature Operating temperature Operating temperature Operating temperature Storage temperature Relative Humidity % RH (non condensing) IP rating	-20 °C to +40 °C -20 °C to +55 °C -20 °C to +70 °C -20 °C to +60 °C -20 °C to +80 °C 5 to 95 % IP66 to EN 60529	FB Zone 1 T6 FB Zone 1 (T4) LB Zone 2 LB Zone 2 and EEx i loops <75 % Typ 4X
Approvals	ATEX ATEX ATEX ATEX	PTB 97 ATEX 1075 PTB 97 ATEX 1074U PTB 03 ATEX 2042 PTB 99 ATEX 2186	FB Remote installation in Zone 2G FB Module installation in Zone 2G LB Module installation in safe area LB Module installation in Zone 3GD

Customer components are also available



REMOTE I/O ENCLOSURES POLYESTER (GRP) HOUSING

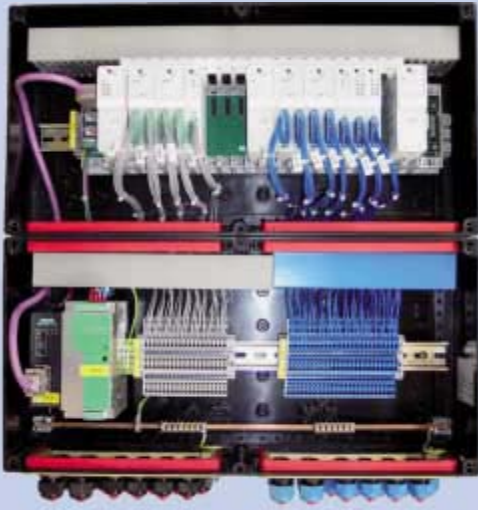

RECOMMENDATIONS FOR POLYESTER (GRP) ENCLOSURES

For a lightweight solution, the economical choice is our GRP field junction box. This is an ideal solution for most installations, with IP66 and Type 4X ingress protection ratings.

CUSTOMER- AND INDUSTRY-SPECIFIC SOLUTIONS FOR REMOTE I/O

No application is not quite the same as another; every application always places new demands on the design and features of a Remote I/O-box. That's why Pepperl+Fuchs delivers custom enclosure solutions for our familiar Remote I/O-products.

In addition to a custom-fit solution for your application, the Remote I/O enclosures reduce engineering costs and allow the fastest possible installation on location.


GENERAL SYSTEM FEATURES

- Ex-approved installation solutions for fieldbus in zones 1 / 2 / 21 / 22 and Div. 1 / Div. 2
- Customer-oriented availability
- Customer- and industry-specific solutions for fieldbus distribution (non-Ex solutions also available)

TECHNICAL INFORMATION

Standardized housing dimensions	271 x 544 x 210 mm	407 x 544 x 210 mm	544 x 544 x 210 mm
	271 x 815 x 210 mm	407 x 815 x 210 mm	544 x 815 x 210 mm
		407 x 1088 x 210 mm	544 x 1088 x 210 mm
		407 x 1359 x 210 mm	544 x 1359 x 210 mm
others available on request			
General housing features	Polyester (GRP)		
	Mounting brackets		Optional
	M10 grounding screws		
	DIN-rail mounted		
	Earth conduit plate		Optional
	II 2GD EEx e II available		
Cable glands M16, M20, M25	Plastic		
	Nickel-plated brass		
	Stainless steel		
	Nickel-plated brass for armored cable		
	Stainless steel for armored cable		
Condensate drain / ventilation M20	Plastic		
	Nickel-plated brass		
	Stainless steel		
Terminals for EEx e	Screw terminals		Grey
	Spring terminals		Grey
Terminals for EEx ia	Screw terminal with disconnect		Blue
	Spring terminal with disconnect		Blue
	Terminals with disconnect		Blue
Internal wiring in cable duct	Black		EEx e
	Blue		EEx ia
Grounding bar	Isolated		
	Non isolated		
Environmental	Operating temperature	-20 °C to +40 °C	FB Zone 1 T6
	Operating temperature	-20 °C to +55 °C	FB Zone 1 (T4)
	Operating temperature	-20 °C to +70 °C	LB Zone 2
	Operating temperature	-20 °C to +60 °C	LB Zone 2 and EEx i loops
	Storage temperature	-20 °C to +80 °C	
	Relative Humidity % RH (non condensing)	5 to 95 %	<75 %
IP rating	IP66 to EN 60529	Typ 4X	
Approvals	ATEX	PTB 97 ATEX 1075	FB Remote installation in Zone 2G
	ATEX	PTB 97 ATEX 1074U	FB Module installation in Zone 2G
	ATEX	PTB 03 ATEX 2042	LB Module installation in safe area
	ATEX	PTB 99 ATEX 2186	LB Module installation in Zone 3GD

Customer components are also available

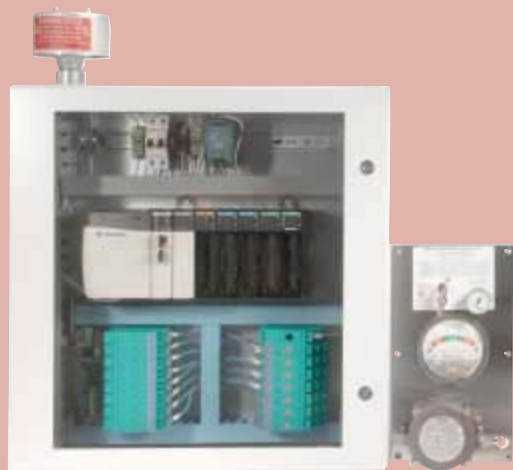

CUSTOMER- AND INDUSTRY-SPECIFIC SOLUTIONS

Pepperl+Fuchs is the global leader in the design and manufacturing of purge and pressurization systems, as well as in the implementation of purged cabinet solutions. Our purge systems are produced in accordance with ISO 9001 international standards, and are certified to global NFPA, ATEX, FM and UL requirements, for applications ranging from Type X, Y and Z, to Ex [nP] and Ex [p]. This will enable you to operate general-purpose equipment within hazardous or corrosive areas in most parts of the world.

Our purged cabinet solutions offer the option of UL698 certification to complement those servicing the North American market.

As a manufacturer of purge systems and customized cabinets, Pepperl+Fuchs can offer a complete solution, whatever your needs may be. We can design and build an enclosure based on your specification, and install the necessary purge equipment, taking the guesswork out of your application. Additionally, Pepperl+Fuchs can mount your control equipment and P+F intrinsic safety barriers in these cabinets for a complete solution.

With multiple enclosure material types and sizes, choosing Pepperl+Fuchs custom cabinet solutions is the right choice for your purged and pressurized cabinet applications.

PURGE SYSTEM FEATURES

- Components mounted on stainless steel panel
- General-purpose equipment can be operated in a Div 2/Zone 2 area
- General-purpose equipment can be operated in a Div 1/Zone 1 area
- Div 2 rated equipment can be used in a Div 1 area
- Enclosure sizes up to 250 ft³ (7.08 m³)
- Optional pressure loss alarm relay on Type Y, Z and Ex [nP] systems
- Filter-regulator with pressure gauge provides clean, protective gas to the enclosure
- LED indication and end-user interface display on Type X, Ex [p] systems
- Certified to NFPA, ISA, and ATEX standard
- EPCU (electronic power control unit) controls enclosure power and monitors system operation
- Fully automatic systems for easy installation and operation

ENCLOSURE FEATURES

- 316 stainless steel, aluminum, glass reinforced plastic enclosures (other materials available upon request)
- Enclosure sizes up to 250 ft³ (7.08 m³)
- Purge system pre-assembled to enclosure for easy customer installation
- UL698 system certification
- NEMA 4X/ IP66 enclosure rating
- Customer-specific solutions available

CLASS I APPLICATIONS

Type	Div	Group	Equipment	90 ft ³ (2.54 m ³)	250 ft ³ (7.08 m ³)
Z	2	A-D	General-purpose	3003-LPS-CI / 3003-WPSA-CI	3004-LPS-CI / 3004-WPSA-CI
		C&D	General-purpose	3003-LPS-CI / 3003-WPS-CI	3004-LPS-CI / 3004-WPS-CI
X	1	A-D	General-purpose	6000 Series	6000 Series
Y	1	A-D	Div. 2	3003-LPS-CI / 3003-WPSA-CI	3004-LPS-CI / 3004-WPSA-CI
		C&D	Div. 2	3003-LPS-CI / 3003-WPS-CI	3004-LPS-CI / 3004-WPS-CI

Note: Class II systems also available

ZONE APPLICATIONS

Type	Div	Group	Equipment	90 ft ³ (2.54 m ³)	250 ft ³ (7.08 m ³)
Ex [nP]	2	IIC	General-purpose	3003-LPS-CI	3004-LPS-CI
		IIB+H2	General-purpose	3003-WPSA-CI	3004-WPSA-CI
Ex [p]	1	IIB+H2	General-purpose	6000 Series	6000 Series



CABINETS



Pepperl+Fuchs supports a wide range of cabinet solutions including interface, marshalling, control room and fieldbus power types. We are able to integrate our full line of products into a cabinet that reduces your commissioning time, and most importantly, reduces your upfront costs. Our intrinsic safety, purge & pressurization, fieldbus, power supply and HART interface products can be combined into a complete project solution to meet the exact requirements of your application.



CABINETS

Pepperl+Fuchs supports you during all project phases

Initial concept

Basic design

Detailed design

Factory/site acceptance testing (FAT/SAT)

Start-up and commissioning

As a leading manufacturer of process interface equipment, our products are easily integrated into any panel design for maximum uptime and superior performance.

We can integrate any of your products into custom-designed cabinet solutions for your applications. Our cabinets are engineered and assembled to your specifications and our design team is available to assist you during any phase of your project.



PROCESS AUTOMATION – PROTECTING YOUR PROCESS



For over a half century, Pepperl+Fuchs has been continually providing new concepts for the world of process automation. Our company sets standards in quality and innovative technology. We develop, produce and distribute electronic interface modules, Human-Machine Interfaces and hazardous location protection equipment on a global scale, meeting the most demanding needs of industry. Resulting from our world-wide presence and our high flexibility in production and customer service, we are able to individually offer complete solutions – wherever and whenever you need us. We are the recognized experts in our technologies – Pepperl+Fuchs has earned a strong reputation by supplying the world's largest process industry companies with the broadest line of proven components for a diverse range of applications.

1 Worldwide/German Headquarters
Pepperl+Fuchs GmbH
Mannheim · Germany
Tel. +49 621 776 2222
E-Mail: pa-info@de.pepperl-fuchs.com

2 Asia Pacific Headquarters
Pepperl+Fuchs PTE Ltd.
Singapore
Company Registration No. 199003130E
Tel. +65 6779 9091
E-Mail: pa-info@sg.pepperl-fuchs.com

3 Western Europe & Africa Headquarters
Pepperl+Fuchs N.V.
Schoten/Antwerp · Belgium
Tel. +32 3 6442500
E-Mail: pa-info@be.pepperl-fuchs.com

4 Middle East/India Headquarters
Pepperl+Fuchs (India) Pvt. LTD
Bangalore · India
Tel. +91 80 28378030
E-Mail: pa-info@in.pepperl-fuchs.com

5 North/Central America Headquarters
Pepperl+Fuchs Inc.
Twinsburg · Ohio · USA
Tel. +1 330 486 0002
E-Mail: pa-info@us.pepperl-fuchs.com

6 Northern Europe Headquarters
Pepperl+Fuchs GB Ltd.
Oldham · England
Tel. +44 161 6336431
E-Mail: pa-info@gb.pepperl-fuchs.com

7 Southern/Eastern Europe Headquarters
Pepperl+Fuchs Elcon srl
Sulbiate · Italy
Tel. +39 039 62921
E-Mail: pa-info@it.pepperl-fuchs.com

8 Southern America Headquarters
Pepperl+Fuchs Ltda.
São Bernardo do Campo · SP · Brazil
Tel. +55 11 4339 9935
E-Mail: pa-info@br.pepperl-fuchs.com

www.pepperl-fuchs.com

 **PEPPERL+FUCHS**
PROTECTING YOUR PROCESS